


## Installation Instructions For Reading Lamp


- 1) Drill  $\text{\O}4\text{mm}$  hole on parcel tray for passing power supply wires fig.1

fig.1

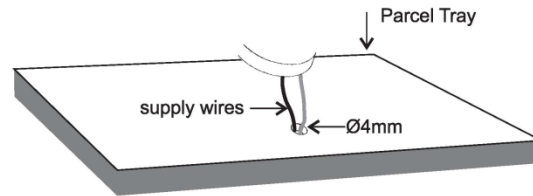

- 2) Tighten two self trapping screws on the base

fig.2

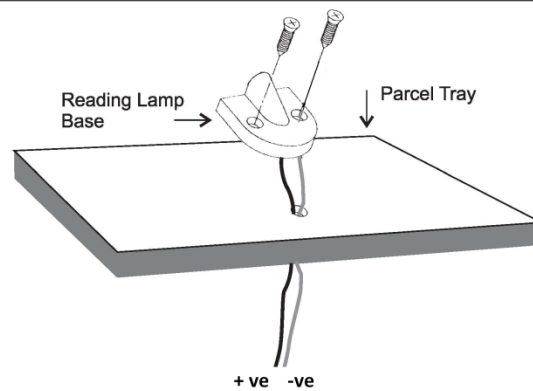

- 3A) Screw in clip for stable gooseneck while driving fig.3
- 3B) Red wire connect to positive "+" & Black wire connect to negative "-" of nearest available power supply source like the rear tail lamp etc.

fig.3

